



TYPICAL WIRING DIAGRAM

NOTES:


1. ALL UNITS ARE cUL LISTED & DESIGNED ACCORDANCE WITH INDUSTRY STANDARDS.
2. TRANSFORMERS ARE DRY-TYPE, CLASS AA, ENCAPSULATED NEMA 1 ENCLOSED FOR INDOOR USE.
3. TRANSFORMERS ARE WALL / MACHINE MOUNTABLE VIA THE ATTACHED BRACKETS.
4. TRANSFORMERS ARE CONSTRUCTED BASED UPON A 40°C AMBIENT ENVIRONMENT.
5. MAINTAIN 1" CLEARANCE FROM ALL LIVE PARTS.
6. PAINT COLOR IS RAL# 7042.

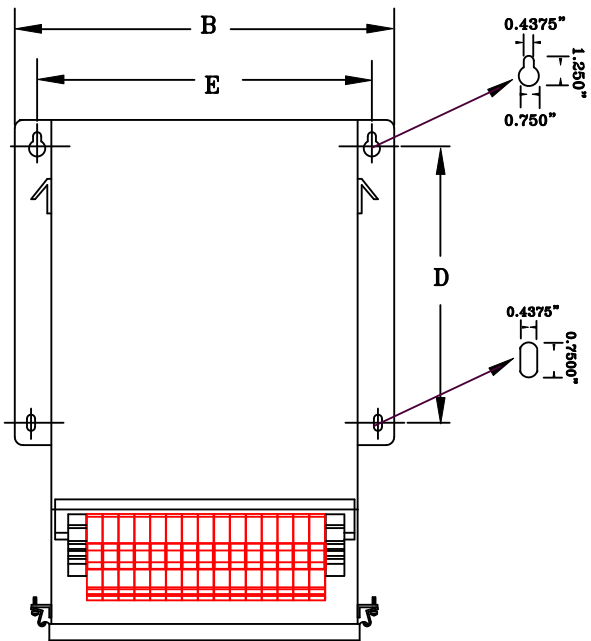

FRONT VIEW

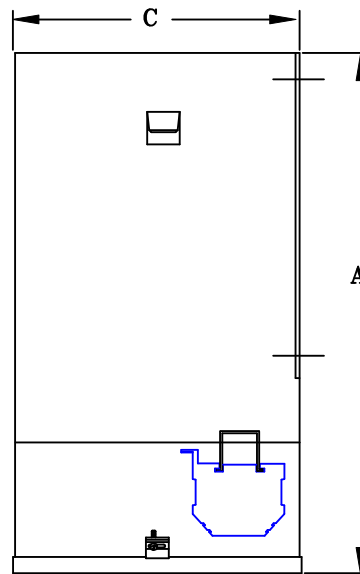

SIDE VIEW

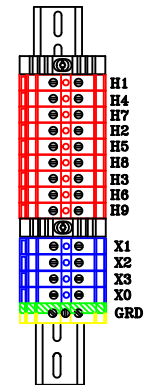

TERMINAL VIEW

APPROXIMATE DIMENSIONS (INCHES)

KVA	A	B	C	D	E	HARDWARE	MTG SLOTS	ENCLOSURE	lbs.	WEATHER SHIELD	TERMINAL TYPE
SEE BELOW	15.25	12.38	9.00	8.50	11.25	3/8-16	0.437" x 0.750"	N10	125	N/A	TBs

DRAWINGS
 APPROVAL
 RECORD
 OTHER

	15.0 KVA	12.0 KVA										
INPUT VOLTAGE	575Y/332	480Y/277	CUST.	XXXXXXXX								
OUTPUT VOLTAGE	480Y/277	400Y/231	JOB									
TEMPERATURE RISE IN °C	115		CATALOG									
WINDINGS & TERMINALS	<input type="checkbox"/> ALUMINUM	<input checked="" type="checkbox"/> COPPER	NOTE	XXXXXXXX								
FREQUENCY IN HERTZ	60		BY	ENG. LOG.	TITLE 3-PHASE, 600 VOLT CLASS AUTO DRY TYPE TRANSFORMER							
INPUT TAPS	546, 604		DATE									
POWERTRAN	REV	MFG. LOG.	DWG. NO.		3EF485FSTA15							
	DATE:	DWG. FILE										