


TYPICAL WIRING DIAGRAM


NOTES:

1. ALL UNITS ARE cUL LISTED AND DESIGNED ACCORDANCE WITH INDUSTRY STANDARDS.
2. TRANSFORMERS ARE DRY-TYPE, CLASS AA, VENTILATED NEMA 2 ENCLOSED FOR INDOOR USE.
3. TRANSFORMERS ARE FLOOR MOUNTED.
4. AVAILABLE ACCESSORIES FOR THIS UNIT:
A) OUTDOOR WEATHERSHIELD KIT
B) WALL MOUNTING BRACKETS
5. TRANSFORMERS ARE CONSTRUCTED BASED UPON A 40°C AMBIENT ENVIRONMENT.
6. MAINTAIN 1" CLEARANCE FROM ALL LIVE PARTS.
7. PAINT COLOR IS ANSI #61.

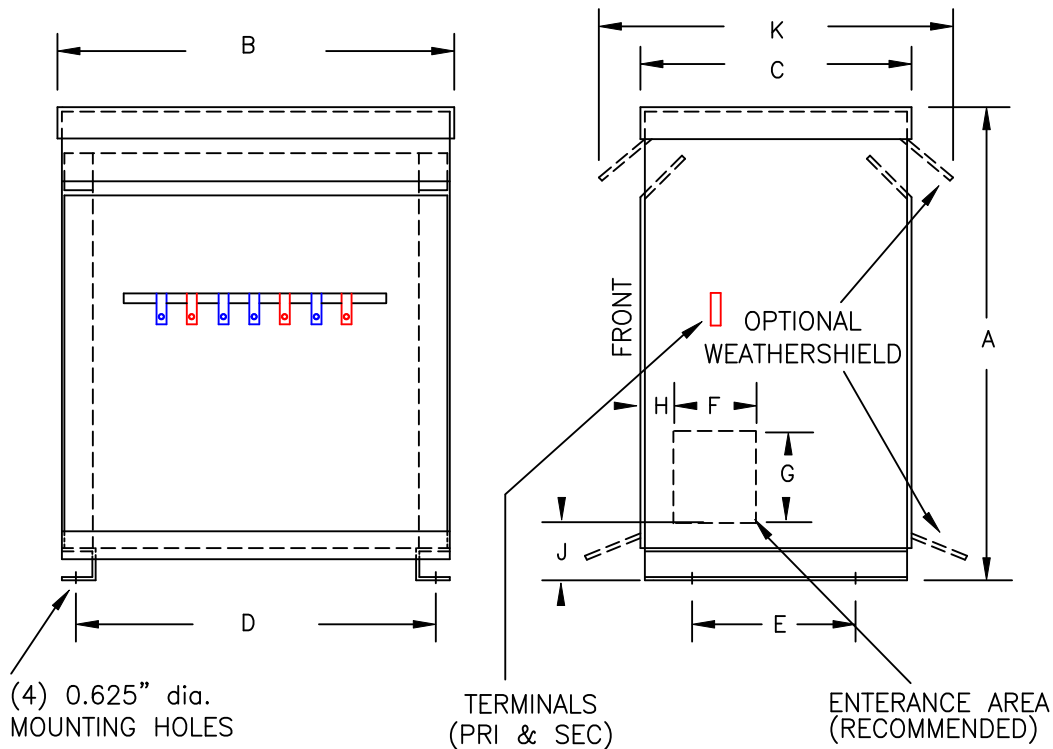

FRONT VIEW

SIDE VIEW

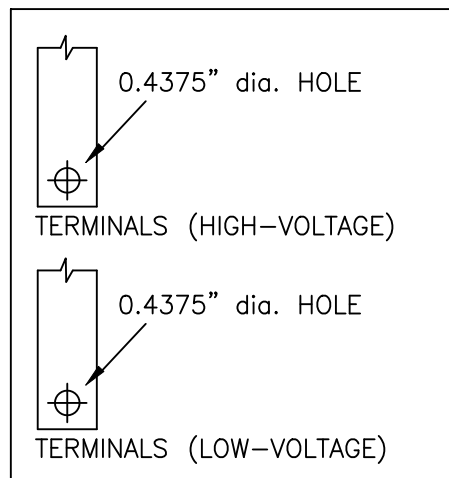

TERMINAL DETAILS

APPROXIMATE DIMENSIONS (INCHES)

KVA	A	B	C	D	E	F	G	H	J	K	ENCLOSURE	lbs.	WEATHER SHIELD	TERMINAL TYPE
SEE BELOW	46.00	32.00	28.00	30.25	24.75	6.00	10.00	1.00	9.00	32.12	3PT-75K	1205	WS-10B	BUSBAR

		500.0 KVA		400.0 KVA													
INPUT VOLTAGE	575Y/332		480Y/277		CUST.		XXXXXXXX										
OUTPUT VOLTAGE	480Y/277		400Y/231		JOB												
TEMPERATURE RISE IN °C	150				CATALOG												
WINDINGS & TERMINALS	<input checked="" type="checkbox"/> ALUMINUM		<input type="checkbox"/> COPPER		NOTE		XXXXXXXX										
FREQUENCY IN HERTZ	60				BY		ENG. LOG.		TITLE		3-PHASE, 600 VOLT CLASS						
INPUT TAPS	546, 560, 589, 604				DATE						AUTO						
						REV		MFG. LOG.		DWG. NO.							
						DATE:		DWG. FILE								3PT485PA500	

DRAWINGS
 APPROVAL
 RECORD
 OTHER

