



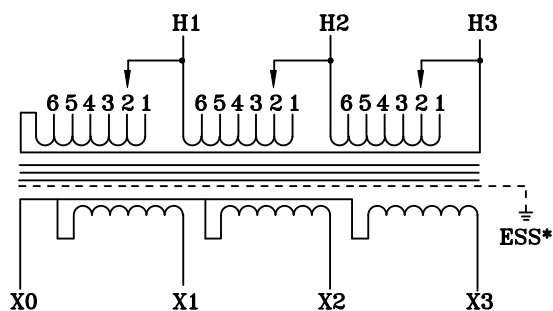

TYPICAL WIRING DIAGRAM

## NOTES:

1. ALL UNITS ARE cUL LISTED AND DESIGNED ACCORDANCE WITH INDUSTRY STANDARDS.
2. TRANSFORMERS ARE DRY-TYPE, CLASS AA, VENTILATED NEMA 2 ENCLOSED FOR INDOOR USE.
3. TRANSFORMERS ARE FLOOR MOUNTED.
4. AVAILABLE ACCESSORIES FOR THIS UNIT:  
A) OUTDOOR WEATHERSHIELD KIT  
B) TERMINAL LUG KIT
5. TRANSFORMERS ARE CONSTRUCTED BASED UPON A 40°C AMBIENT ENVIRONMENT.
6. MAINTAIN 1" CLEARANCE FROM ALL LIVE PARTS.
7. PAINT COLOR IS ANSI #61.

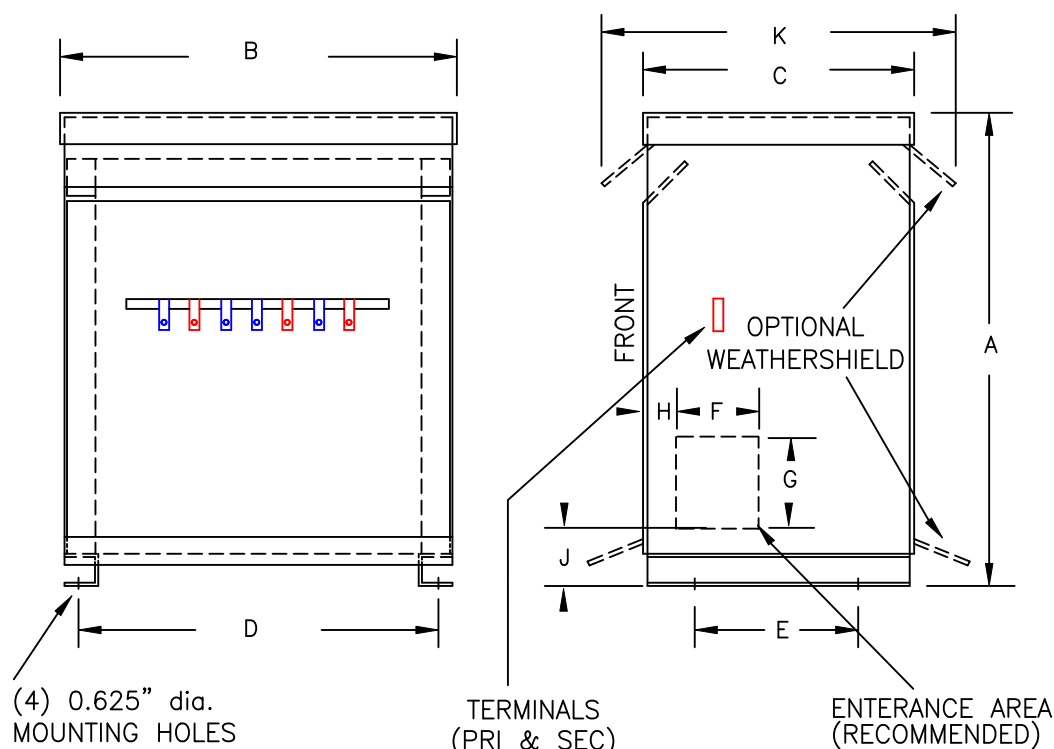

FRONT VIEW

SIDE VIEW



TERMINAL DETAILS

## APPROXIMATE DIMENSIONS ( INCHES )

| KVA  | A     | B     | C     | D     | E     | F    | G    | H    | J    | K     | L    | BOX     | lbs. | WEATHER SHIELD | TERMINAL TYPE |
|------|-------|-------|-------|-------|-------|------|------|------|------|-------|------|---------|------|----------------|---------------|
| 15.0 | 29.00 | 17.12 | 19.38 | 15.50 | 16.50 | 4.00 | 4.00 | 1.00 | 5.75 | 23.50 | ---- | 3PT-15K | 245  | WS-2           | BUSBAR        |

\* ELECTROSTATIC SHIELD GROUNDED TO TRANSFORMER CASE AT FACTORY ( IF APPLICABLE )

DRAWINGS  
☒ APPROVAL  
☐ RECORD  
☐ OTHER

|                        |                                                                              |                                                        |            |
|------------------------|------------------------------------------------------------------------------|--------------------------------------------------------|------------|
| PRIMARY VOLTAGE        | 600 DELTA                                                                    | CUST.                                                  | XXXXXXXXXX |
| SECONDARY VOLTAGE      | 400Y/231                                                                     | JOB                                                    |            |
| TEMPERATURE RISE IN °C | 150                                                                          | CATALOG                                                |            |
| WINDINGS & TERMINALS   | <input checked="" type="checkbox"/> ALUMINUM <input type="checkbox"/> COPPER | NOTE                                                   | XXXXXXX    |
| FREQUENCY IN HERTZ     | 60                                                                           | BY                                                     | ENG. LOG.  |
| PRIMARY TAPS           | 540, 555, 570, 585, 615, 630                                                 | DATE                                                   | TITLE      |
|                        |                                                                              | REV                                                    | MFG. LOG.  |
|                        |                                                                              | DATE:                                                  | DWG. FILE  |
|                        |                                                                              | DWG. NO.                                               |            |
|                        |                                                                              | 3-PHASE, 600 VOLT CLASS ISOLATION DRY TYPE TRANSFORMER |            |
|                        |                                                                              | 3PTN767-15K-E2                                         |            |

POWERTRAN