



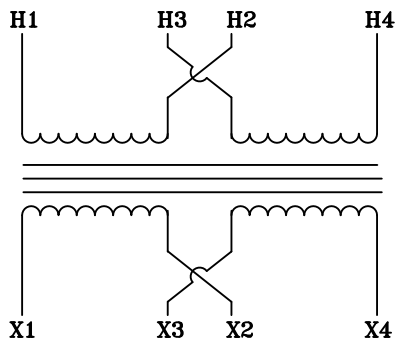


TYPICAL WIRING DIAGRAM

NOTES:


1. ALL UNITS ARE cUL LISTED & DESIGNED ACCORDANCE WITH INDUSTRY STANDARDS.
2. TRANSFORMERS ARE DRY-TYPE, CLASS AA, ENCAPSULATED NEMA 4X ENCLOSURE FOR INDOOR / OUTDOOR USE.
3. TRANSFORMERS ARE WALL / MACHINE MOUNTABLE VIA THE ATTACHED BRACKETS.
4. TRANSFORMERS ARE CONSTRUCTED BASED UPON A 40°C AMBIENT ENVIRONMENT.
5. MAINTAIN 1" CLEARANCE FROM ALL LIVE PARTS.
6. NOT PAINTED (316 STAINLESS STEEL).

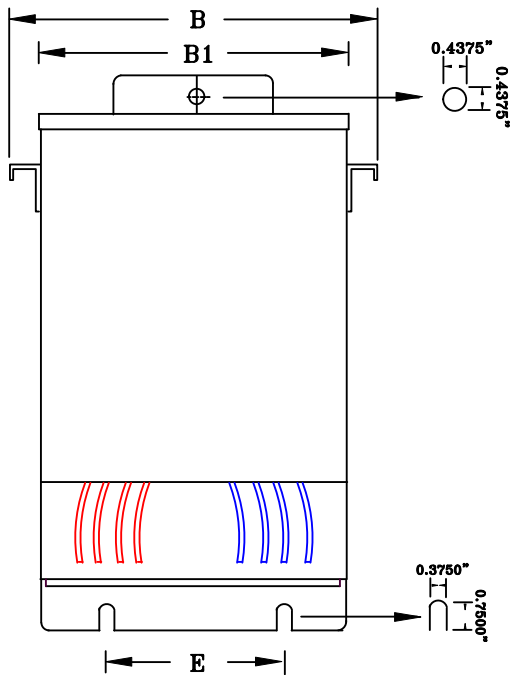


FRONT VIEW

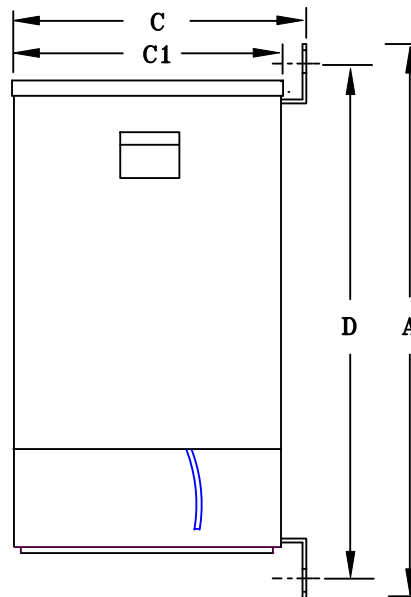

SIDE VIEW



BOTTOM VIEW



TERMINAL VIEW

APPROXIMATE DIMENSIONS (INCHES)

KVA	A	B	B1	C	C1	D	E	HARDWARE	MTG SLOTS	ENCLOSURE	WEIGHT	TERMINAL TYPE
3.0	17.50	13.50	10.50	10.00	9.00	16.50	5.00	1/4-20	0.375" x 0.625"	EN-870	70	LEADs

* ELECTROSTATIC SHIELD GROUNDED TO TRANSFORMER CASE AT FACTORY (IF APPLICABLE)

DRAWINGS
☒ APPROVAL
☐ RECORD
☐ OTHER

PRIMARY VOLTAGE	240 x 480		CUST.		
SECONDARY VOLTAGE	120 x 240		JOB		
TEMPERATURE RISE IN °C	115		CATALOG		
WINDINGS & TERMINALS	☐ ALUMINUM	☒ COPPER	NOTE XXXXXXXXXX		
FREQUENCY IN HERTZ	60		BY	ENG. LOG.	TITLE 1-PHASE, 600 VOLT CLASS ISOLATION DRY TYPE TRANSFORMER
PRIMARY TAPS	NONE		DATE		
			REV	MFG. LOG.	
			DATE:	DWG. FILE	
					N4XF134L3000-ENC